



Pool and Spa Pumps

## TROUBLE FREE PERFORMANCE

100, 125 and 150 motors with double insulated water circuit, IP55 rated and 431 grade stainless steel shaft for long life and high performance.

## **BUILT TO LAST**


Strong, single piece glass filled thermoplastic body that is UV and corrosive resistant will give you years of service.


## **QUALITY YOU CAN RELY ON**

High grade carbon/graphite mechanical seal with 316 Stainless steel spring assembly gives your motor added protection.

## **LOW OPERATING COST**

Efficient hydraulic performance shortens run times, reducing power consumption.



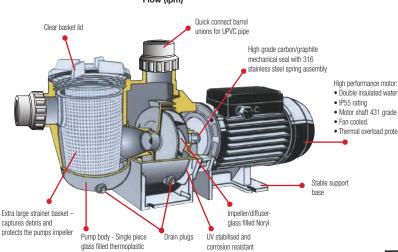

SYDNEY:- 36 South Street, Rydalmere, NSW 2116, Austral	ia.
Tel: +61 2 9898 8686 Fax: +61 2 9898 1754	

AUCKLAND:- 7 Industry Road, Penrose, Auckland 1061, New Zealand. Tel: +64 9 525 7570 Fax: +64 9 525 6580



Model No. maxiGrange		ite (lpm) 10m	No H	m. P	kW	Amps	Total Length	Motor Frame
100	248	219	1.0	00	0.91	4.00	600	71
125	267	237	1.2	25	1.08	4.80	600	71
150	336	309	1.5	50	1.31	5.80	647	80
Inlet/Outlet	Straine	er basket	size	Pha	ase	Volts	Cycle	RPM
50mm		2.1 L		1		220-240	50	2860

